


# LED DockLight

LED DockLights offer energy efficient high output bright light in a durable exterior. Non-corrosive and UL rated for wet locations, the LED DockLight is suited for the toughest indoor and outdoor applications. Complete with impact resistant, optically clear acrylic lens and 5 high-intensity LED emitters with custom focusing optics, the LED DockLight provides a consistent quality and low maintenance lighting solution helping you be green.

Patent # USD0587833

## FEATURES

- Sustainable lighting with a powerful output
- Industrial luminaire with 15 watt power consumption
- 50,000 hours rated life reducing maintenance significantly
- Durable exterior to hold up to the toughest environments
- Non-corrosive and safe to use outdoors
- Safety yellow for maximum visibility
- Several electrical connections available
- UL rated for wet locations
- Attaches directly to standard dock light arms for easy retrofit
- Purchase the compatible arm of your choice in 24", 42" or 60" lengths

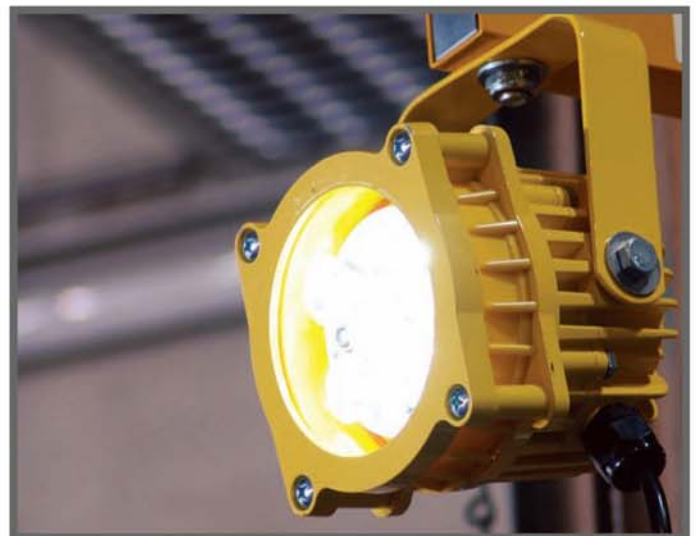



## LED DockLight Compatible Arms



- Strong, non-corrosive single strut steel arm with on/off switch and female receptical


- Available in 24", 42" and 60" lengths

- 42" and 60" have an articulated arm

- Wear resistant 3 conductor AC cord fits directly into standard outlet

### Design

Protected by Patent # USD0587833



*The powerful LED Docklight has been designed to deliver light all the way back into a 53' trailer!*


	10'	20'	30'	40'	45'	48'	53'
LED DockLight12° CBCP: 10,571 cd	105	20	12	6.6	5.2	4.6	3.8
Quartz Halogen	28	14	8	5			
Incandescent	15	5	3	2			

Beam Angle: FWHM (Full Width Half Max)  
Light Output in FC

### Comparison



### Candlepower Curve

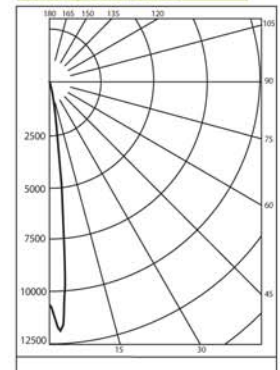

Testing performed by LTL in accordance with IED LM-79-08  
IES format photometrics are available at [www.energyfocusinc.com](http://www.energyfocusinc.com)

### ORDERING CODE:

Model	Color Temp	Beam Spread	Size	Electrical Connection	Color
LEDDL					
LEDDL	765 - 75 CRI, 6500K	NSP - 12° Beam NFL - 32° Beam	15 - Small Fixture 15Watt	PIS - 10' cord, hooded male plug (IEC 60320-C14 plug) PNS - 10' cord, std. male plug (Nema 5-15) HWS - 10' cord, hardwire leads	SY - Safety Yellow

### ARM:

Model	Type	Arm
LEDDL	ARM	
LEDDL	ARM	24 - Arm length 24" 42 - Arm length 42", Articulated 60 - Arm length 60", Articulated

Distributed By  
Loading Dock Supply, LLC  
<http://loadingdocksupply.com>  
1-800-741-1258