

Wheel Risers

STEEL AND ALUMINUM WHEEL RISERS (SWR AND AWR)

- Eliminates unsafe, below dock loading conditions
- Reduces damage to loading equipment
- Heights up to 12"

Wheel risers allow trailers to be positioned properly above dock for more efficient loading. Widths of 18" and 24". Lengths to accommodate both single, dual, or tandem axle trailers. Wheel risers can be portable or permanently positioned. Custom sizes are available.

STEEL (SWR)


- Tabs for anchoring

ALUMINUM (AWR)

- Have hand holds for easy moving.



SWR

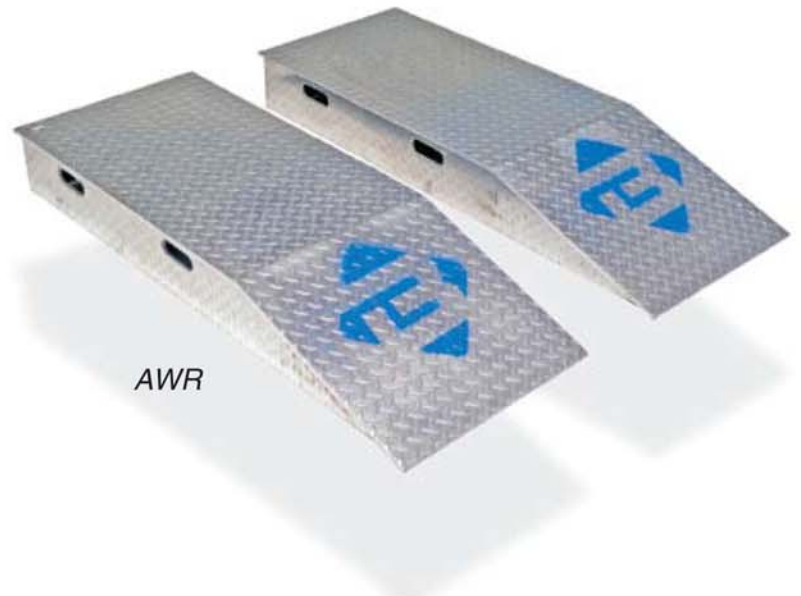

AWR

