

EXTRUDED DOCK BUMPERS

USES/APPLICATIONS

- Appropriate for outdoor and indoor protection
- For commercial loading docks, parking garages, marinas, carts, etc.
- On vehicles such as tow trucks, trailers, and heavy duty construction equipment
- In plant wall protection from forklifts and other material handling equipment

MATERIAL

- Extruded SBR
- All bumpers have impact resistance (ASTM 2632) of 75% with a durometer reading of 70±5

FEATURES


- Variety of styles available for greater flexibility
- Custom drilling available upon request
- Pre-cut and full length (10' undrilled) sizes kept in stock
- Mounting Bar option available for D4 and D6 extruded models

INSTALLATION


- Anchor bolts easily installed through pre drilled holes
- Mounting bar option allows a superior mount with anchor bolts seated on the bar
- Adhesives can be used to mount light duty applications

BENEFITS


- Installs easily
- Eliminates costly and unsightly damage to equipment, vehicles, and structures
- Resistant to all types of weather
- One piece construction
- One year warranty




Model D-6



Model D-4



Model E



Model D-2

Model	A Thickness	B Height	Length	Bolt Sizes	Approximate Weight	Color
D2	1 3/4"	2"	Up to 10'	1/4" x 2"	2 LB	Black
D3	3"	3"	Up to 10'	1/2" x 3"	3 LB	Black
D4	4"	4 1/4"	Up to 10'	1/2" x 3"	6 LB	Black
D6	6"	6"	Up to 10'	1/2" x 3"	10 LB	Black
E	1 1/2"	8"	Up to 10'	3/8" x 3-3/4"	6.5 LB	Black

NOTE: Extruded rubber bumpers are drilled for 1/2" bolts.

EXTRUDED CORNER GUARDS

USES/APPLICATIONS

- Mounted vertically or horizontally along the corners of walls or beams to prevent damage
- Mount on cart edges to provide abrasion resistance and enhance appearance
- Provides protection in storage spaces, parking garages and loading docks

MATERIAL

- (EPM) For gray Guards
- (SBR) For Black Guards

INSTALLATION

- Adhesive and/or mechanical fasteners for permanent protection




BENEFITS

- Easy installation
- Maintenance free
- Tough and long lasting in severe weather
- One year warranty

FEATURES

- Heavy duty flexible compound prevents damage to equipment and vehicles
- Gray colored corner guards reduce unsightly black marks on equipment

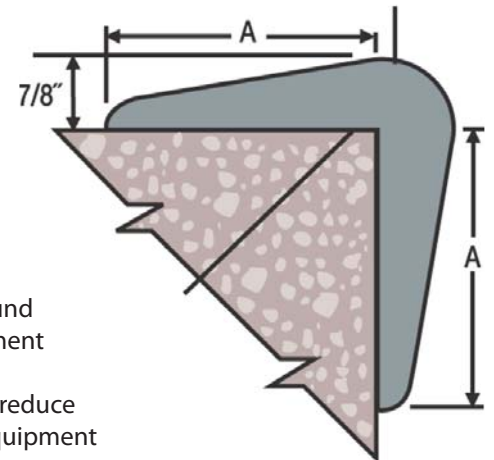

Model	Thickness	A Width	Length	Linear Weight Per Ft.	Color
CG-1	7/8"	4"	Up to 10'	2.6 lbs/ft	GRAY
CG-2	7/8"	4"	Up to 10'	2.6 lbs/ft	BLACK