

CAT5E STP OUTDOOR CABLE

CMX UV RATED with Messenger


Cat5eCableGuy.Com

DESCRIPTION

Category-5E STP, Outdoor Rated Cable with Messenger, 24AWG Solid-Bare Copper.

FEATURES

- Ideal for Outdoor Aerial Applications
- Galvanized Steel Messenger for Support
- Shielded to protect against EMI/RFI
- Drain wire to prevent ESD
- Easily Identified Color-Striped Pairs
- 24AWG Solid Copper Conductors
- Exceeds TIA/EIA-568B.2 Standards
- ETL Listed RoHS Compliant
- 1000ft Wooden Spool

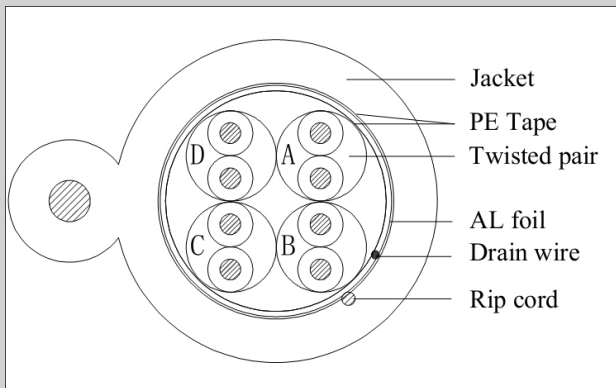

Technical Data

Rated Temperature	70°C
Flammability Test	IEC-332-1
Conductor	Solid Bare Copper
Size	24 AWG
Insulation	PE
Average Thickness (mm)	0.228
Insulation Diameter (±0.005mm)	0.97
Twisted Pair Diameter (±0.01)	1.94
PE-Tape	Yes
Drain Wire (TC)	0.40
AL-Foil	Yes
PE-Tape	Yes
Assembly Diameter	4.80
Messenger	Galvanized Steel
Diameter (mm)	1.30
Jacket (Black)	LLDPE
Average Thickness (mm)	0.80x0.65
Outer Diameter (±0.10mm)	6.50x2.60
Rip Cord	Yes (Nylon)
Color of Pairs	
Pair 1:Blue,White-Blue	
Pair 2:Orange,White-Orange	
Pair 3:Green,White-Green	
Pair 4:Brown,White-Brown	


Mechanical Characteristics

Test Object	Jacket
Test Material	LLDPE
Before Tensile Strength (Mpa)	>=10.6
Aging Elongation (%)	>=300
Aging Condition (°Cxhrs)	100x168
After Tensile Strength (Mpa)	>=85% of unaged
Aging Elongation (%)	>=50% of unaged
Cold Bend (-20±2° Cx4hrs)	No Crack

Marking on Jacket

VERTICAL 4001453 cETLus VERIFIED CMX STP 4PR 24AWG
OUTDOOR UV CAT5E 350MHz TIA/EIA - 568B.2 RoHS XXXFT
(SEQUENTIAL FOOT MARKERS ON JACKET)

Jacket color available in
Black

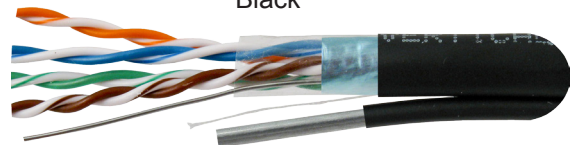

Cat5eCableGuy.Com
Where Quality Cable is on Sale!



CAT5E STP OUTDOOR CABLE

CMX UV RATED with Messenger


PERFORMANCE

Electrical Characteristics:

1.0-350MHz Impedance (Ohms)	100±15
1.0-350.0MHz Delay Skew (ns/100m)	<=45
Pair-to-Ground Capacitance Unbalance (pF/100m)	<=330
Max. Conductor DC Resistance 20°C (ohms/km)	95
Resistance Unbalance (%)	<=5

Frequency (Mhz)	Return Loss (Min dB)	Attenuation Max (dB/100m)	Next (Min dB)
1	20.0	2.0	68.3
4	23.0	4.1	59.3
8	24.5	5.8	54.8
10	25.0	6.5	53.3
16	25.0	8.2	47.3
20	25.0	9.3	45.8
25	24.3	10.4	44.3
31.25	23.6	11.7	45.9
62.5	21.5	17.0	38.4
100	20.1	22.0	33.8
200	18.0	32.4	30.8
300	16.8	41.0	31.2
350	16.3	44.9	30.1

Frequency (Mhz)	PSNext Min (dB)	ELFEXT Min(db/100m)	PSELFEXT Min(db/100m)
1	62.3	63.8	60.8
4	53.3	51.7	48.7
8	48.8	45.7	42.7
10	47.3	43.8	40.8
16	44.3	39.7	36.7
20	42.8	37.7	34.8
25	41.3	35.8	32.8
31.25	39.9	33.9	30.9
62.5	35.4	27.8	24.8
100	32.3	23.8	21.0
200	27.8	17.7	14.7
300	25.2	14.2	11.2
350	24.2	12.9	9.9



Cat5eCableGuy.Com
Where Quality Cable is on Sale!

Rev. 01/2013

Subject to change without notice.