

RG6 STANDARD SHIELD DIRECT BURIAL (GEL FILLED)


Cat5eCableGuy.Com

DESCRIPTION

RG6 Standard Shield Direct Burial, 18AWG, Solid CCS Conductor, Aluminum Foil with 60% Braid, CL2, Polyethylene Jacket.

FEATURES

- 18AWG Solid Conductor
- 75 Ohm Impedance
- Polyethylene (PE) Jacket
- Direct Burial (Gel Filled)
- ISO 9001:2000
- ETL, RoHS Compliant
- 1000ft Wooden Spool

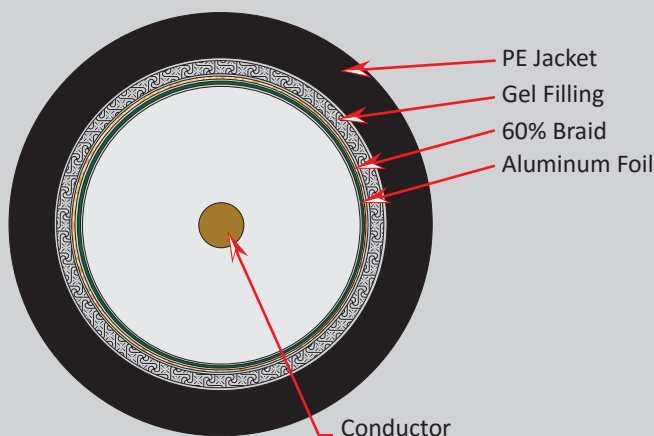

Construction

Conductor	Copper Clad Steel (CCS)
Diameter	1.02±0.01mm (18AWG)
Dielectric	Foam PE
Diameter	4.57±0.05mm
Shield	Bonded Aluminum Foil
Braid	Alu-Mag
Coverage	60%×16×5×0.12±0.005mm
Gel Filled	Yes (Waterproof)
Jacket	Polyethylene (PE)
Diameter	6.90±0.10mm


Electrical Characteristics

Sparker Test	3000VAC
Impedance	75±3 Ohm
Capacitance	54±3pF/m
Velocity of Propagation	85%
Return Loss	(1~470Mz)≥25dB (470~1000Mz)≥22dB (1000~3000Mz)≥18dB

Mechanical Characteristics

Operating Temperature Range 60°C

Jacket color available in
Black



Cat5eCableGuy.Com

Where Quality Cable is on Sale!



Rev. 07/2013

Subject to change without notice.