

snorkel
AUSTRALIA



TRAILER MOUNT
MHP15/44HD



TRAILER MOUNT

MHP15/44HD

The Snorkel MHP Trailer Mounted Series can be used extensively in a wide range of construction, building and maintenance applications.



This heavy duty trailer mounted articulated boom lift is fitted with a superb 5hp efficient engine for a smooth and accurate response. Featuring a safe and stable working height of up to 14.8m with outrigger/boom safety interlocks making this unit very safe and easy to operate.


Key features

- › A versatile jib with 140 degrees rotation
- › Platform rotator allows operators to have greater versatility
- › A two man steel platform with a safe load rated at 227kgs
- › Proportional speed control
- › Heavy duty tow coupling
- › Heavy duty jockey wheel
- › Hydraulic disc brakes
- › Reliable gasoline engine with optional bi-energy power
- › 600V AC rated wire to platform
- › Hour meter
- › Lockable hinged covers
- › Independently operated hydraulic outriggers with pot hole protection


Additional options

- › Manual drive
- › 3600 continuous rotation turntable
- › Flashing light
- › 110/240VAC GFCI power to platform
- › Platform rotator
- › Lifting lugs
- › Automatic stabilisers
- › 10.9m cut out switch
- › Alternative power options:
 - › Diesel engine
 - › 24V DC battery power
 - › 110 / 240V AC motor & pump
 - › Combinations of the above with gas or diesel to give a bi-energy power source

WORKING SPAN

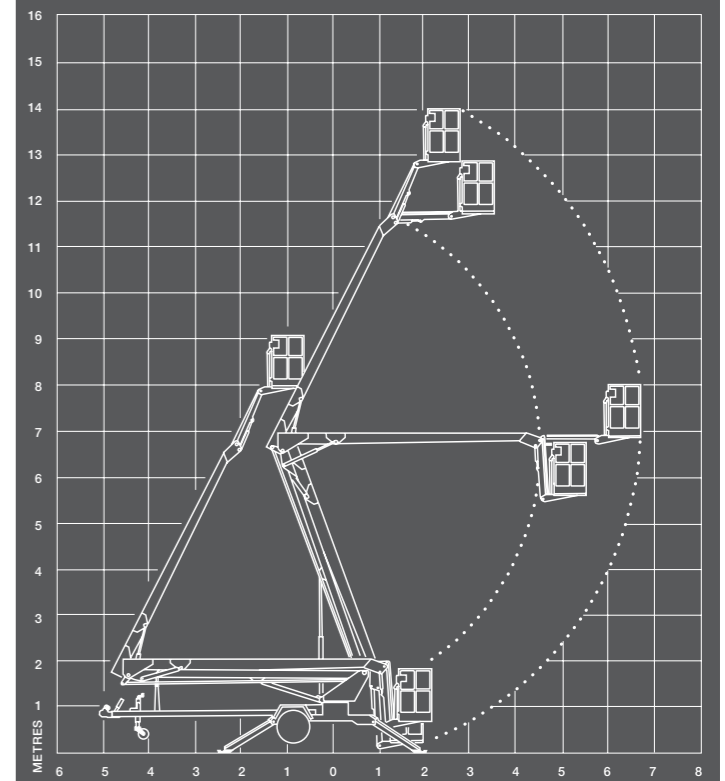

COMPACT DESIGN

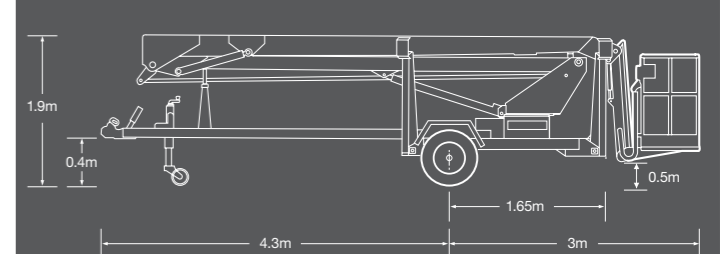

TRAILER MOUNT
MHP15/44HD

Contact us

At Snorkel, we've made it easier for you to find the information you need. Speak to us or visit our website www.snorkel.com.au for more information.

- Sales
1300 900 700
- Technical support
1300 700 450
- Parts and service
1300 103 040

Specifications

Working height	15.2m	50'
Platform height	13.4m	44'
Maximum outreach	6.4m	21.0'
Rated load		
– standard	227kg	500lb
– with rotator	200kg	440lb
Platform size	1.25 x 0.78 x 1.07m	4' 1" x 2' 6" x 3' 5"
Platform construction	Steel	
Platform levelling	Mechanical	
Boom type	Articulating	
Horizontal reach	6.45m at 8m	21' 1" at 26' 4"
Max wind speed 12.5m/sec	45km/hr	28mph
Turntable rotation	540° non-continuous	
Power source – standard	Gasoline engine 5.5hp	
Hydraulic system	Proportional electro/hydraulic	
Stabilisation	4 independently operated hydraulic outriggers with safety interlocks	
Stabiliser footprint – maximum	3.7 x 3.6m	12' 1" x 13' 9"
Standard colour	Snorkel orange base and covers, white turret and booms	
Transport height	2.1m	6' 10"
Overall length	7.45m	24' 5"
Overall width outriggers extended	3.7m	12' 1"
Overall width outriggers stowed	1.77m	5' 9"
Tyre size	185 R15	
Brakes	Hydraulic disc	
Maximum towing speed	80km/hr	50mph
Maximum rated axle capacity	2000kg	4409lb
Weight – standard model	1500kg	3306lb
Trailer tongue weight	90kg	198lb
Insulation rating	Nil on standard models	

DANGER: Standard models described in this brochure are NON-INSULATED and do not provide electrocution protection from contact with or close proximity to energised conductors which is pointed out on the decals and placards attached to the machine. Products in this brochure comply with relevant ANSI and Australian Standards. This literature is for illustrative purposes only. Consult Operating/Maintenance and Parts Manuals for proper procedures. Specifications may vary and are subject to change without notice.



DEALER STICKER



TRAILER MOUNT

MHP 15/44HD

