




INSTALLATION INSTRUCTIONS

1635 E 37th ST N #1
Wichita, Kansas 67219
Telephone: 800-346-7332
Web: www.sportssolutions.com

MODEL: 220016XX – SKI Rack Kit

Thank you for your purchased. We take a **SATISFACTION GUARANTEED** approach to our business and products and will do everything possible to ensure your complete satisfaction. Please do not hesitate to call us on our toll free line (800-346-7332) if we can be of assistance.

Model 22016XX SKI Rack Kit is designed to fit all GEARUP™ Aluminum Floor-To-Ceiling Bicycle Racks, OAK Floor-To-Ceiling, and the OAK FreeStand Rack.

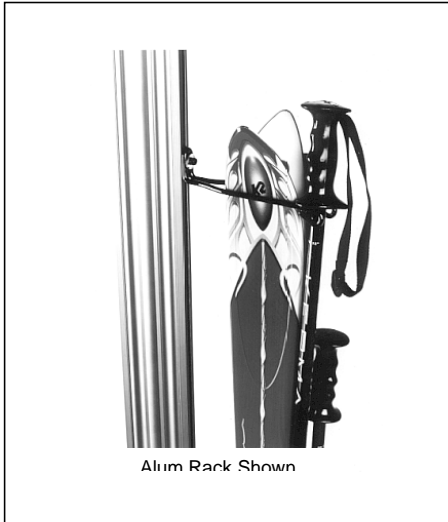

Alum Rack Shown

Bill of Material

When installing to Aluminum Rack:

A.	2	22016 – Vinyl Coated Ski Holder
B.	2	60001 – 3/16" Hex Key
C.	2	60003 – 1/4 - 20 x 5/8" Socket Head Cap Screw
D.	2	60006 – Flat Washer
E.	2	60032 – Slide Nut

When installing to OAK Rack:

A.	2	22016 – Vinyl Coated Ski Holder
F.	2	60019 – Gold Screw
G.	1	60020 – 4mm Hex Key
H.	2	80010 – OAK Spacer Block

INSTALLATION:

We have taken great care to package this product complete and in a manner so as to prevent shipping problems. Before installing, please examine the contents and report any problems as soon as possible by call our TOLL FREE NUMBER 800-346-7332.

- A. Aluminum Rack Installation: (Before Installing – remove bicycles and/or other stored equipment)
 - a. Determine position of upper and lower Ski Holder Arms. Typically the upper holder will be positioned 4 to 5 inches below the tips of the Skis as shown in the picture above. The lower holder will be position approximately 12 inches from the heel. The upper holder bears the weight of the Skis and the lower holder stabilizes the Skis.
 - b. As shown in the drawing to the right, insert 1 Screw (C) through washer (D) through the first holder and screw into the flat side of the slide nut (E). Do not tighten at this time. Take the assembly and insert the slide nut into the side channel of the Main Body of the Rack – same as the Bike Arms.
 - c. Repeat process for second holder. Adjust both arms to fit Skis and tighten the screw using the Hex Key (B).




FIG B

- B. OAK Rack Installation: (Before Installing – remove bicycles and/or other stored equipment)
- a. Determine position of upper and lower Ski Holder Arms. Typically the upper arm will be positioned 4 to 5 inches below the tips of the Skis. (See Fig B). The lower holder will be positioned approximately 12 inches from the heel. The upper holder bears the weight of the Skis and the lower stabilizes the Skis.
 - b. Position spacer block (H) between outside and center upright of main body. Similar to Fig B above, take gold screw (F) insert through holder into side of rack main body and screw into spacer block (H). Tighten using 4mmHex Key (G).
 - c. Repeat process for lower holder.

Thank you again for your purchase. Please do not hesitate to call us at 800-346-7332 if we can be of assistance.

You can view other products and accessories at our web site www.sportssolutions.com.