



04-05 ZXR
KAWASAKI Undertail
Installation instructions



Installation Instructions

1- Remove the tail section and mud flap


Bolts, washers and plastic rivets should be saved for reinstallation of the tail later.

2-Disconnect brake lights, license plate and turn signals.



3-Place the tail section upside down with the undertail in place.

Now mark all the mounting points using a marker.

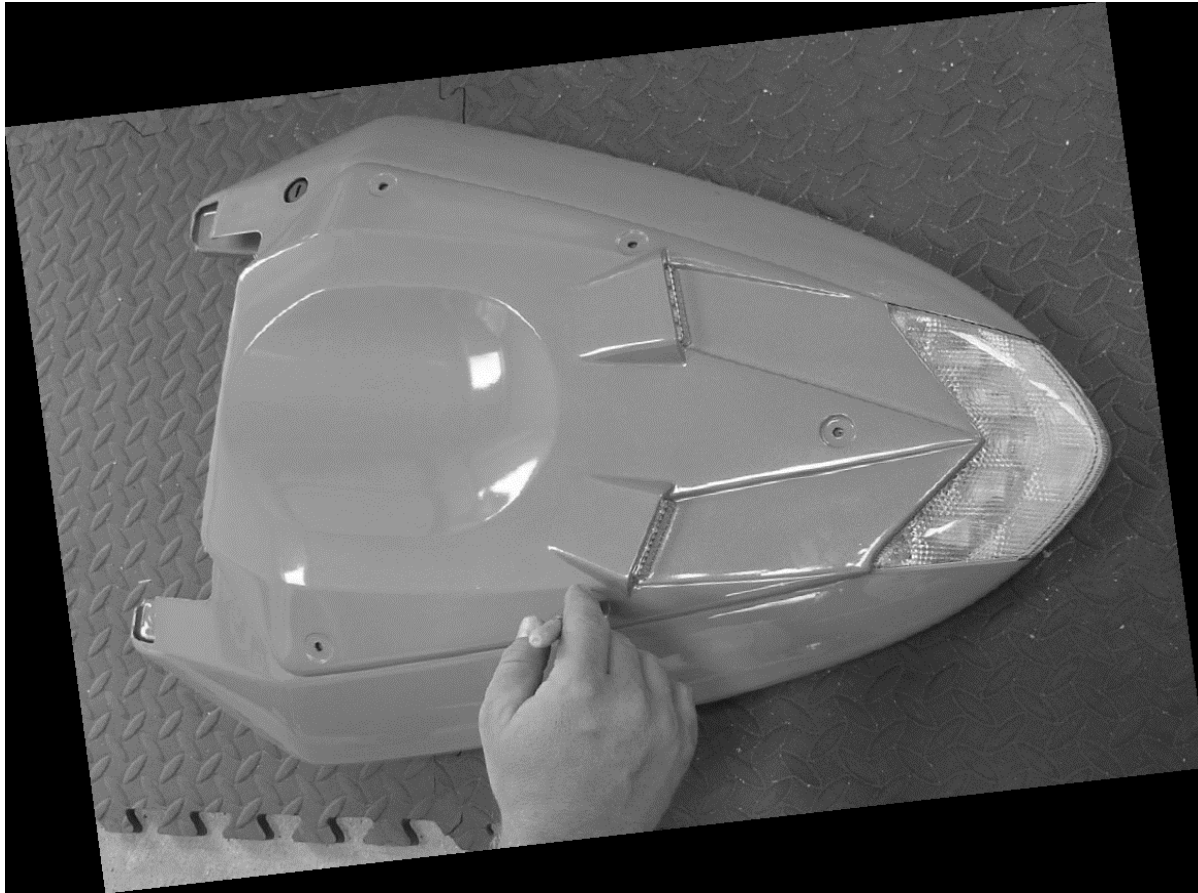



4-Using a stepped drill bit, drill 5 holes (1/4" bit) to fit the mounting hardware,
DO NOT DRILL HOLES LARGER THAN NECESSARY.

PLEASE REMEMBER TO DRILL THE TAIL SECTION NOT THE UNDERTAIL!





Install license plate provided in desired location on undertail (preferably under the signals), carefully mark and drill holes, install using the two (2) sets of bolts & nuts.

Mount the undertail onto the stock tail section using the 5 well-nuts & bolts provided and then, run the signal wires through the openings (see picture)





Re-install stock tail section with the undertail mounted to it.

To install the turn signals:

splice your turn signal wires to the signals in the undertail. On the bike; the green wire is the left turn, gray wire is the right turn and the black w/ yellow tracer wires are the grounds.

On the undertail the red wires are the power wires and the black wires are the grounds.



YOU ARE DONE!!